


Top Mount Generators

6.2 to 25 kW Top Exhaust

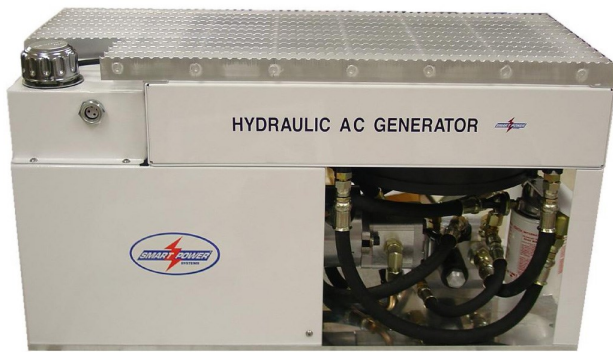

Smart Power Systems® severe-duty, electronic controlled generator systems are designed to meet the most demanding mobile applications, and provide 120VAC/240VAC, 60Hz clean power. The cleanest power available in hydraulic generators.

Their (1) reliability, (2) compact 1 piece module, and (3) proven field performance make Smart Power the *first choice* for fire fighters.

Smart Power Systems® provides ..

Instant power you can rely on

- Trouble free GENSET operation and maintenance
- Rugged tray assembly provides superior component protection
- Smart Start* power engagement reduces stress on genset, PTO and truck powertrain

Compact size

- GENSET module includes integrated hydraulic fluid reservoir
- Drop-in field replacement.
- Smallest industry footprint saves valuable space for other gear/equipment
- Common hookups for 6.2, 8, 10, 15, 20 and 25 kW
- Specifically designed for top mount and compartment mount applications
- Flexible design allows cooler and reservoir to be easily remote mounted

High performance

- Unique “super cooled” power generation for continuous 120°F operation
- Solid state system controller provides total control
- Command and Control Center continuously monitors system and optimizes overall performance
- Meets/exceeds NFPA 1900 requirements

Ease of operation

- Smart Touch® sealed touch pads provide operator interactive capabilities; manual override/control
- Integrated diagnostics and service advisories
- Service intervals of 250 hours or 3 years

Superior warranty protection

- 6 years/2000 hours—includes PTO pump and Command and Control Center
- The total generator system is factory tested and Certified prior to shipment

Outstanding technical support

- Large experienced technical support staff
- Over 45 years of manufacturing expertise
- 165,000 square ft. state-of-the-art facility is ISO9001/2008 certified

Smart Power Systems®

5000 North US-131, Reed City, MI 49677-7922
(231) 832-5525 · Fax (231) 832-3876 · sales@smartpower.com
Smart Power Systems® and Smart Touch® are Nartron registered trademarks
TECHNICAL HOTLINE: (231) 680-4274

*patents 5,087,825; 5,796,183; 7,053,498; 7,459,800; 7,759,811; 8,269,359; 8,269,360; 8,626,384; DE19703404 and others pending