



STARTER SWITCH SEVERE DUTY

(was Delco Remy)

5000 North US 131 • Reed City, MI 49677 •

832-5525

Part No. 051996097

GENERAL DESCRIPTION

- High current momentary push button switch
- Designed for instrument panel mounting
- Replaces light duty starter switches and relays

FEATURES

- 100 amp switching capacity (12 VDC)
- Heavy gauge zinc alloy die-cast housing
- Heat-resistant phenolic base
- Rubber boot protects push button plunger from dust, dirt and moisture
- Sturdy 10-32 studs are silver plated for superior conductivity

ADVANTAGES

- Saves money and improves starting system reliability by eliminating the starter relay
- Lasts many times longer than other starter switches
- Very reliable in rugged, dirty environments
- Reduces vehicle down-time


APPLICATIONS

- Off-highway vehicles
- Marine -- commercial and recreational
- Delivery vehicles (frequent start and stop)
- Over-the-road trucks
- All high-torque starter applications

REV	DATE	BY	DESCRIPTION
A			RELEASED

NOTES:

1. SWITCH OPERATES AT 5 LBS. MAX.
AND BOTTOMS AT 10 LBS. MAX.
2. RECOMMENDED MOUNTING NUT TORQUE
LIMIT 36 TO 48 IN. LBS.
3. BOOT: RUBBER
NUTS & WASHERS: STEEL - ZINC PLATED
CASE: HI-TEMP. PHENOLIC
CONTACT: SILVER ALLOY
TERMINALS: STEEL - NICKEL PLATED
BUSHINGS: ZINC DIE CAST
WEATHERPROOF
4. SUITABLE FOR -40°F OPERATION
5. CAPACITY: 100A AT 12VDC
6. DELCO P/N D907
GM P/N 1996097

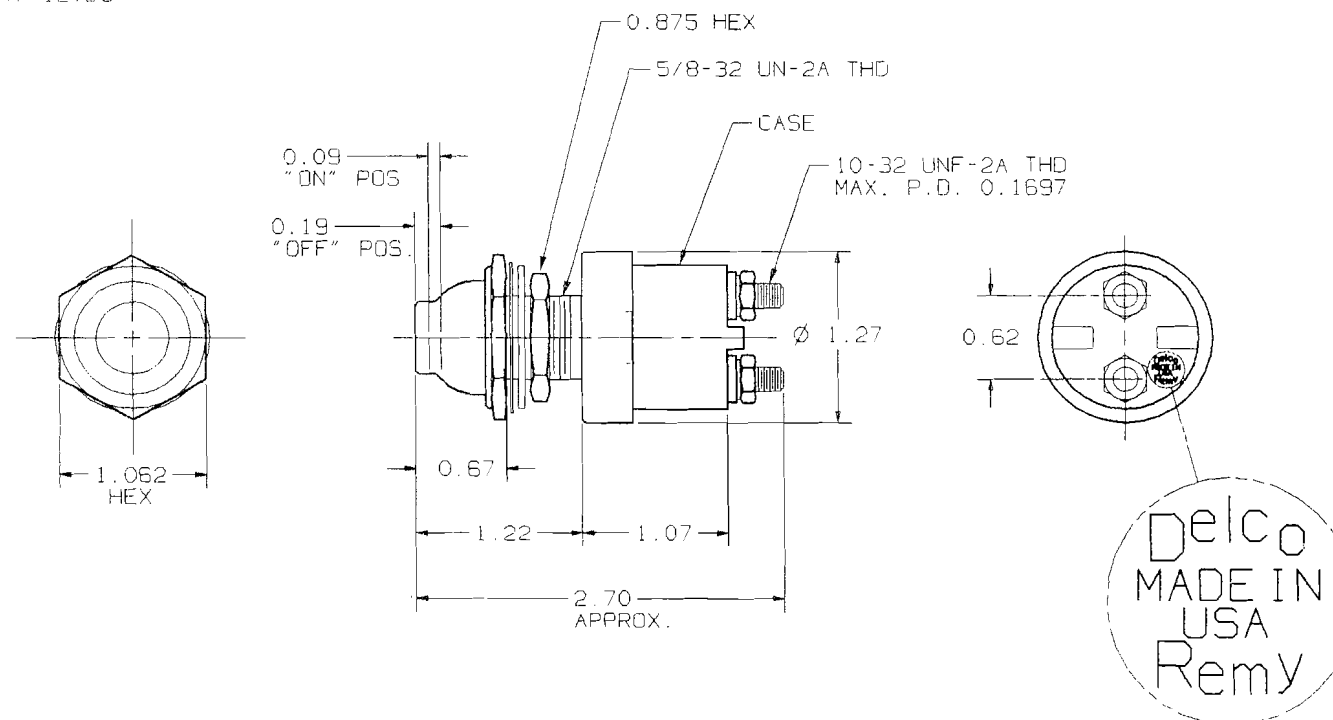

DRAWN	DATE	REV	ITEM	DATE	DESCRIPTION
DO NOT SCALE		LIST OF MATERIALS			
CHECKED	DATE	DIMENSIONS ARE IN INCHES			
APPROVED	DATE	TOLERANCE UNLESS OTHERWISE SPECIFIED			
MATERIAL	2 PLACE DECIMALS ±0.01		NAME		
	3 PLACE DECIMALS ±0.005		SWITCH - PUSH BUTTON, SEVERE DUTY		
NEXT ASSEMBLY	ANGLES ±1/2°		SCALE	NTS	NO
	THOS. INT 2B EXT 2A		SHEET	1	OF 1

NARTRON REED CITY, MI 49677
NARTRON CORPORATION CORPORATION

051996097