

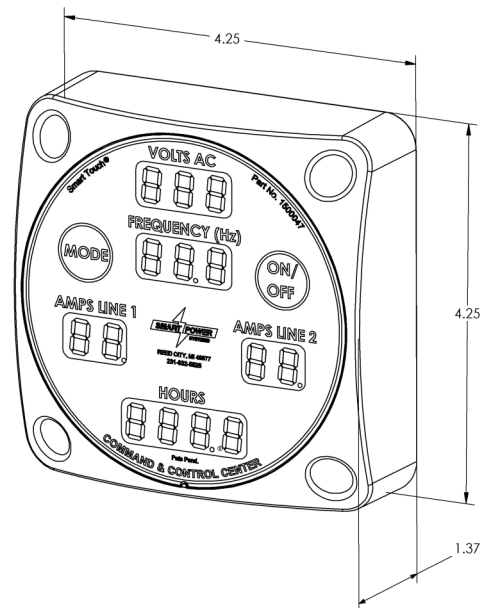
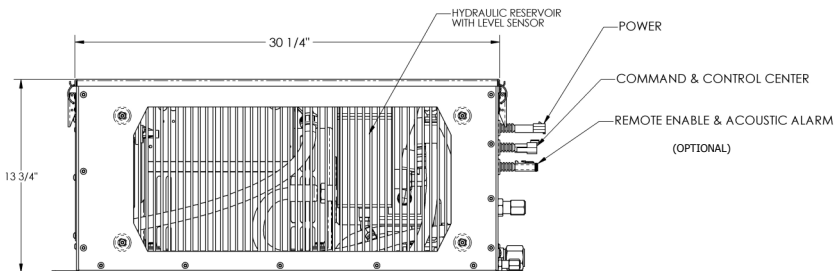
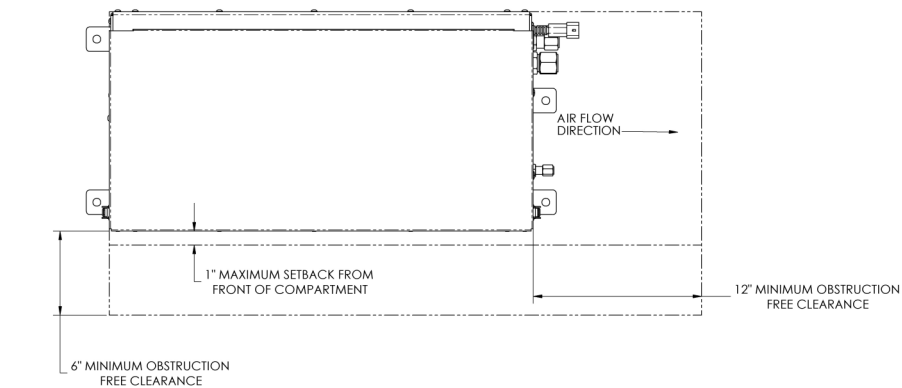


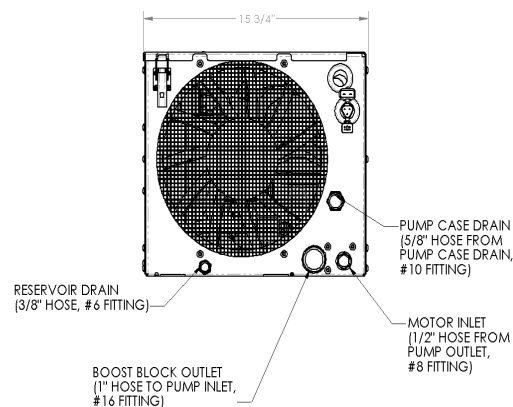

COMMAND & CONTROL CENTER
P/N: 1500047

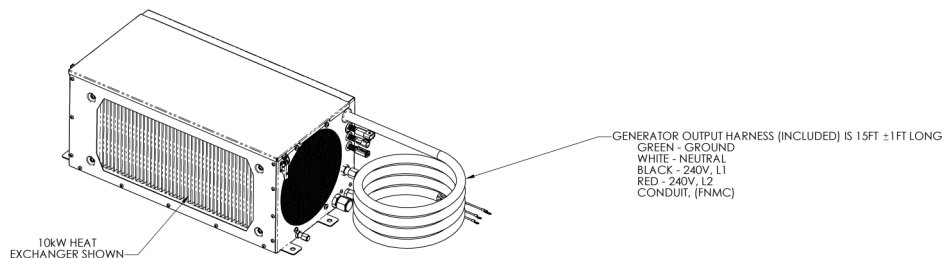

System Specifications

Model number:	ER-6	ER-8	ER-10	ER-110
Part number:	1700006	1700008	1700010	1700110
Power:	6.2kW	8kW	10kW	10kW
AC amps:	52/26	67/34	84/42	84/42
Continuous watts:	6200	8000	10000	10000
Peak watts:	7500	9000	12000	12000
Tray weight:	208 lb.	217 lb.	233 lb.	233 lb.
Hydraulic pump:	45cc, 7/8" 13 tooth spline shaft, SAE B flange	45cc, 7/8" 13 tooth spline shaft, SAE B flange	45cc, 7/8" 13 tooth spline shaft, SAE B flange	60cc, 1" 15 tooth spline shaft, SAE B-B flange
Pump rotation:	Right hand	Right hand	Right hand	Right hand
AC volts:	120/240 VAC (re-connectable to 120 VAC only)			
Frequency:	60 Hertz			
Phase:	Single			
Generator speed:	3600 RPM			
Frame size:	30.25" L x 15.75" W x 13.75" H			
Reservoir:	Integrated within tray			
Hydraulic pump type:	Axial piston w/pressure compensated control			
PSI:	400 to 3600			
GPM:	7 to 13			
Engine speed:	600 RPM to 3000 RPM (application specific)			
Filtration:	10 Micron			
Fluid:	Dexron III			
Pump Options:	1.25" 14-tooth spline shaft, 1" keyed shaft, 1.25" keyed shaft, left hand rotation and through shaft with SAE C 2 bolt flange			