

Power Simplified



XR-4.5 Direct Connect™

Eliminate the panel. Keep the POWER.

KEY FEATURES

- 4500 Watts Continuous / 5500 Watts Peak
- Remote Mount Junction Box
- Integrated Recepticals
- Smart Start™ Power-Engagement
- Precise Voltage & Frequency Control
- SAE J1939 Multiplex Compatible
- Automatic Safety Protections
- Smallest Footprint in the Industry

COMPACT & TOUGH

Simplified Installation, Maximum Performance


**4500 WATTS
CONTINUOUS**

**NFPA 1900
COMPLIANT**

**MADE IN
THE USA**

COMMAND CONTROL CENTER

- Digital Meter Display
- Smart Touch® Controls
- Visual Service Reminders
- Prognostics & Diagnostics
- Operator's Warnings and System Faults
- 100% Waterproof

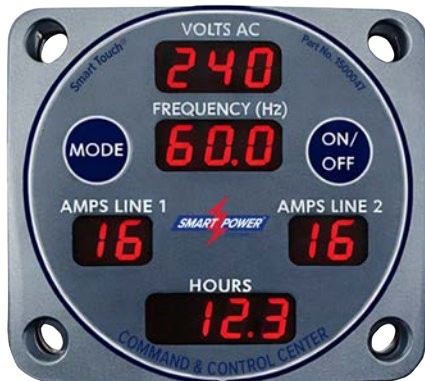

HYDRAULIC PERFORMANCE

- Chassis PTO Driven Pump
- 880–3120 RPM Operation
- Pressure Compensated System
- Multiple Hydraulic Pump Options

ELECTRICAL SPECS



- 120 / 240 VAC
- 37A @ 120V
- 18A @ 240V



6-YEAR WARRANTY

2,000 Hour Parts & Labor

- Fully Transferable

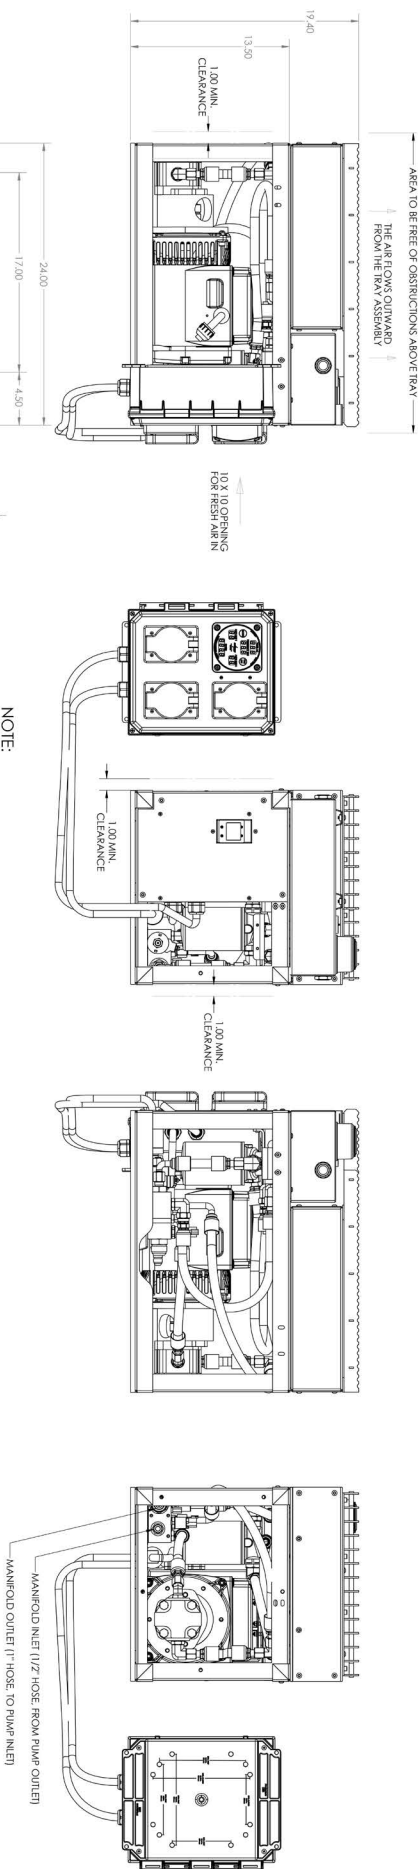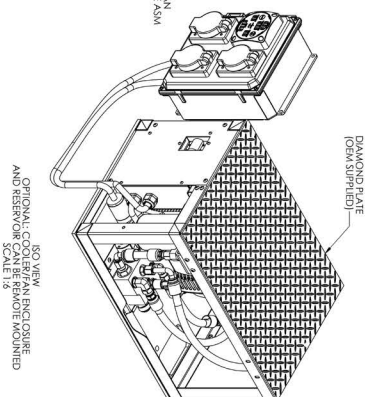

- NOTE:
1. ASSEMBLY IS 100% PRODUCTION TESTED
2. DIMENSION TOLERANCE : ± 0.125
3. RESERVOIR ASSEMBLY CAN BE REMOVED FROM FRAME ASSEMBLY AND REMOTELY MOUNTED
4. TRAY ASSEMBLY MUST BE MOUNTED SO AS TO PREVENT RECIRCULATION OF HOT AIR EXHAUST FROM COOLER
5. GENERATOR OUTPUT CONNECTORS:
TWO (2) INTEGRATED 15-20RW, 120V / 20A TWIST-LOCK RECEPTACLES
ONE (1) INTEGRATED 11.4-30RW, 240V / 30A TWIST-LOCK RECEPTACLE
6. REF. DRAWING 26AXXXXXX MODEL MATRIX FOR SYSTEM DETAILS

[illegible]