


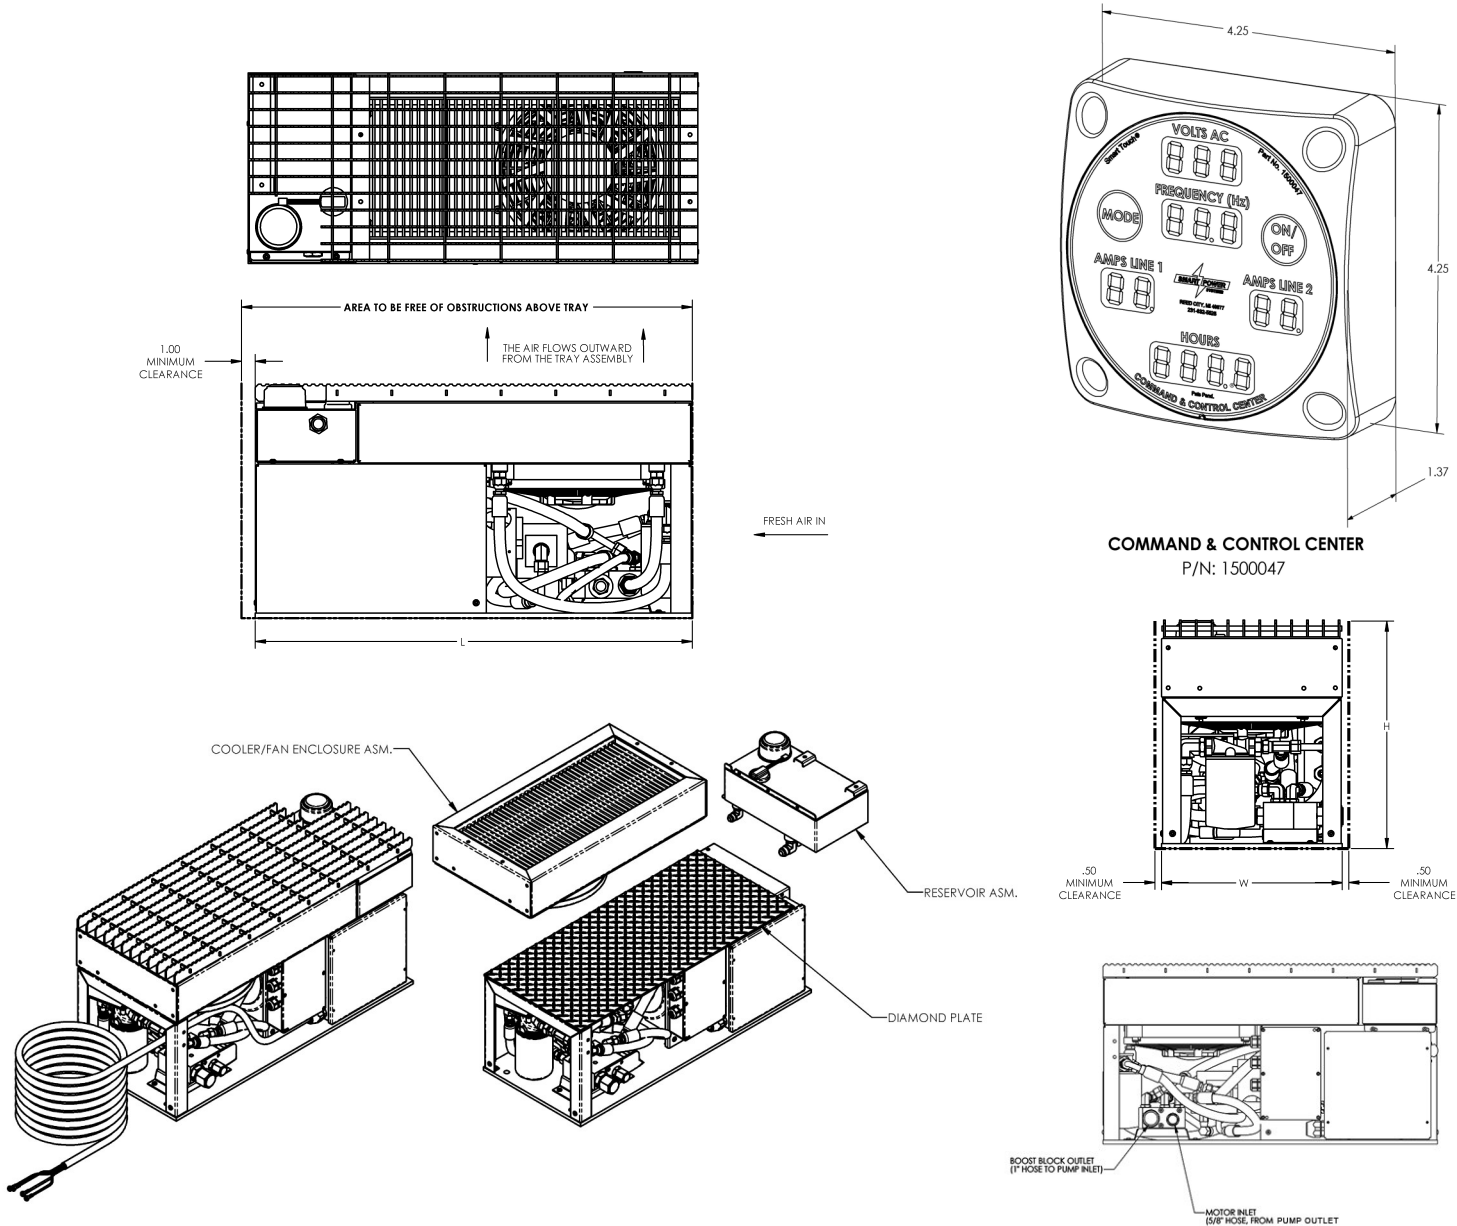

System Specifications

Model number: Part number: Power: AC amps: Continuous watts: Peak watts: Tray weight: Hydraulic pump: Pump rotation:	LRT-6 2610806 6.2kW 52/26 6200 7500 213 lb. 23cc gear pump Left hand	LRT-8 2610808 8kW 67/34 8000 9000 230 lb. 23cc gear pump Left hand	LRT-10 2610810 10kW 84/42 10000 12000 473 lb. 23cc gear pump Left hand	LRT-15 2610815 15kW 125/63 15,000 16,500 488 lb. 23cc gear pump Left hand
LRT-6-8 AC volts: 120/240 VAC (re-connectable to 120 VAC only) Frequency: 60 Hertz Phase: Single Generator speed: 3600 RPM Frame size: 32"L x 13.5"W x 17"H Reservoir: Integrated within frame Hydraulic pump type: Gear pump PSI: 400 to 3600 GPM: 10 Pump shaft speed: 1500-1850 RPM Filtration: 10 Micron Fluid: ISO 46 hydraulic oil or DuraClean™		LRT-10-15 120/240 VAC 60 Hertz Single 1800 RPM 40.5"L x 19 x 22" H Integrated within frame Gear pump 400 to 3600 15 2700—3000 RPM 10 Micron ISO 46 hydraulic oil or DuraClean™		